


DA SERIES


DIMENSIONS (Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.)

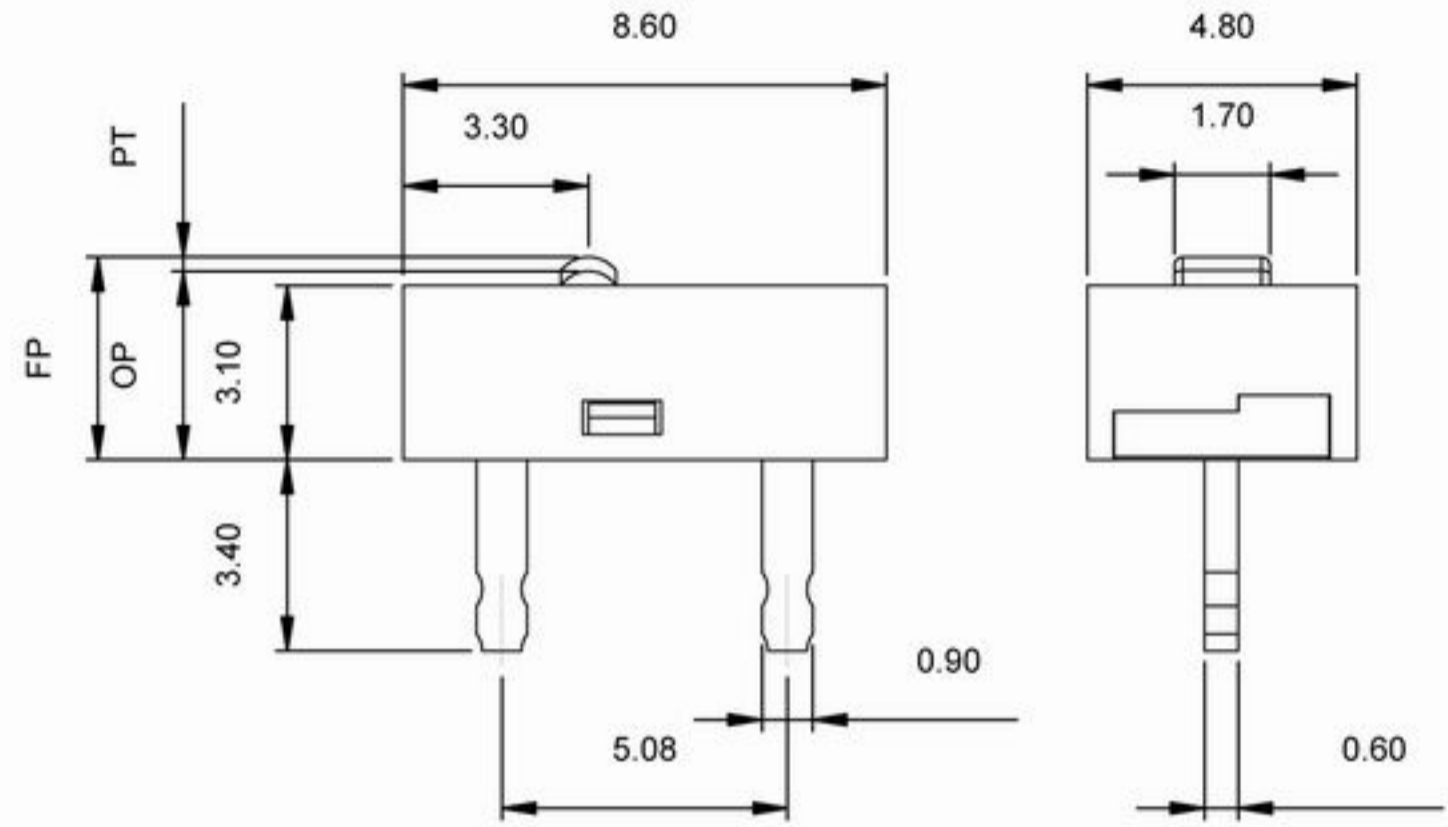


SPECIFICATIONS

- Contact Resistance (initial).....Max. 100mΩ
- Insulation Resistance (at 500VDC/minute)Min. 100MΩ
- Dielectric Strength.....600VAC (50~60Hz)
- Storage Temperature Range..... -40°C to 85°C
- Storage Humidity.....at 40°C, Max. 85% R.H
- Operating Temperature Range..... -25°C to 70°C
- Vibration.....10~55Hz, displacement 0.75 mm (p-p)
- Electrical Service Life.....Min 5,000,000 Operations
- Electrical Operating Frequency.....120 Operations per Minute

MOUNTING HOLES

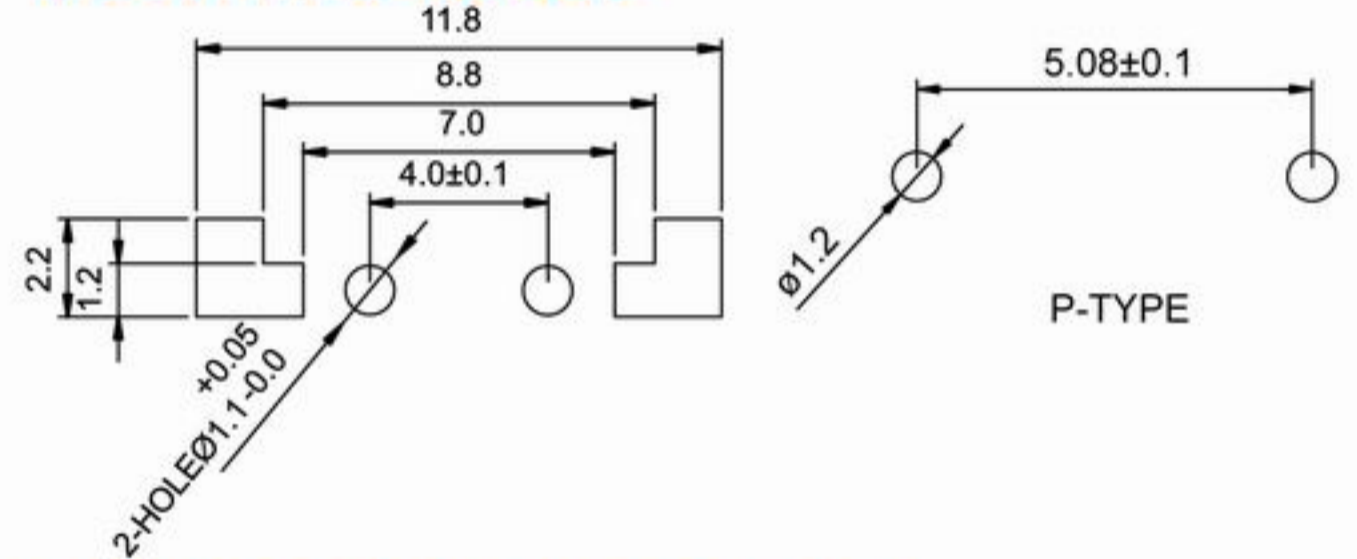

CONTACT CONFIGURATION

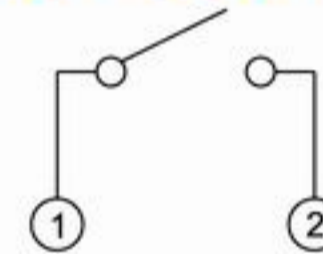


RATING

0.1A 30 VDC


APPLICATION

Mouse

TERMINAL

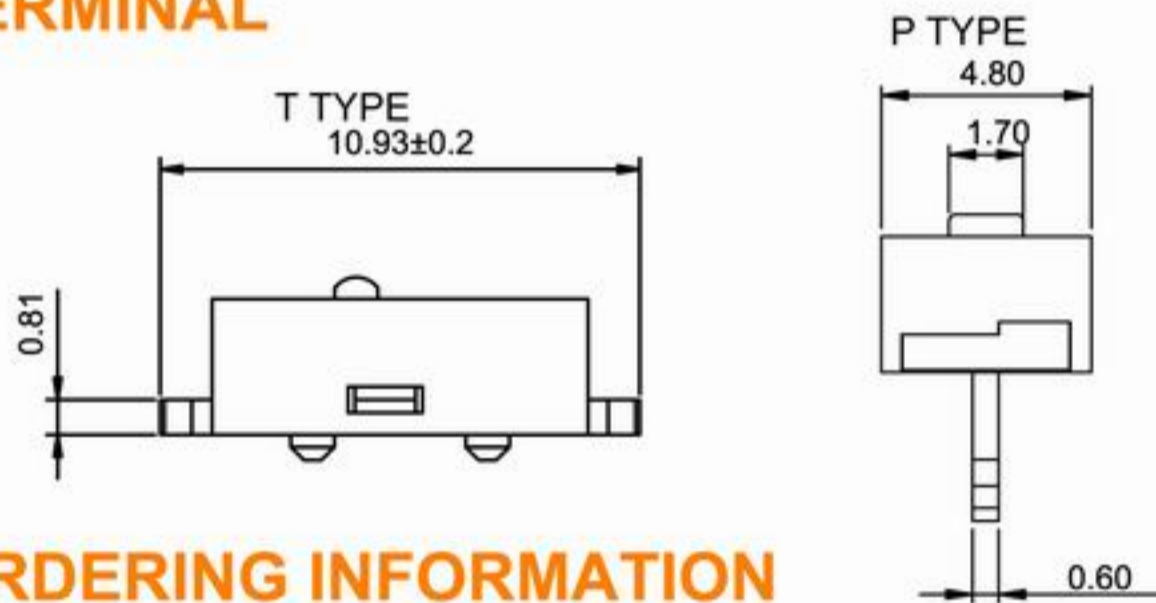

ORDERING INFORMATION

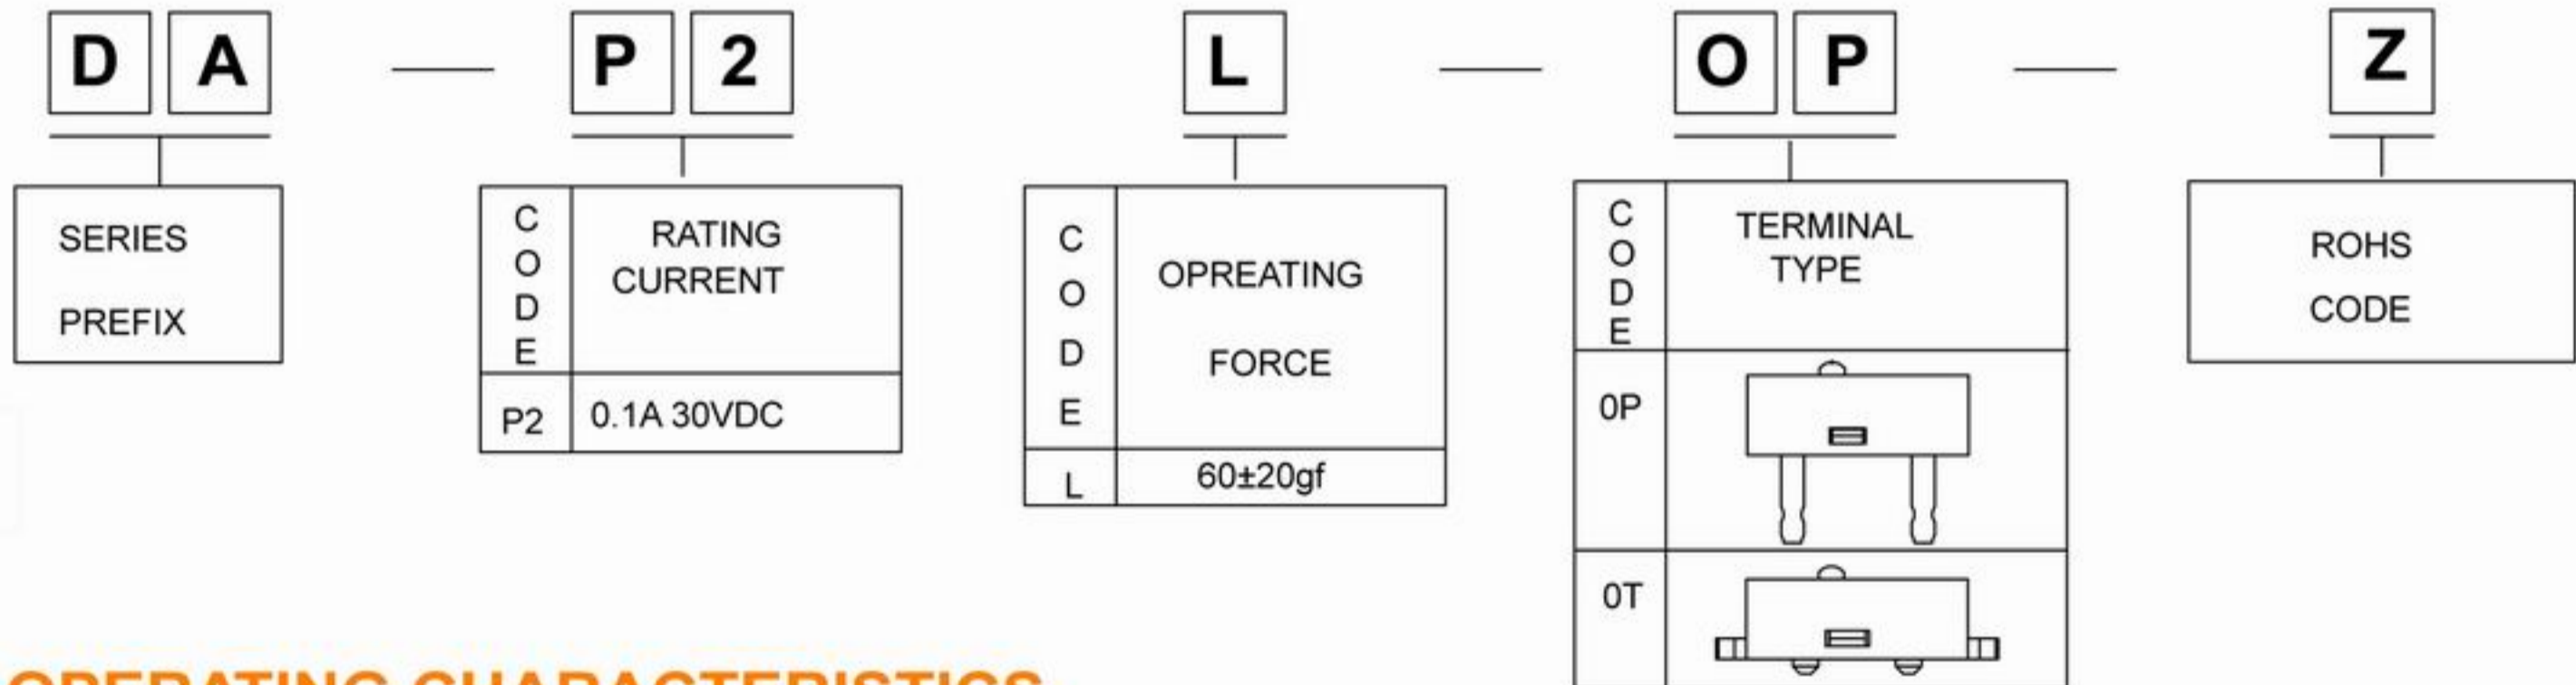

OPERATING CHARACTERISTICS

SWITCH TYPE	PART SUFFIX	OF (gf)	OP (mm)	PT Max.(mm)	OT Min.(mm)	FP Max.(mm)	MD Max.(mm)	RF Max.(gf)
DA-P2L-OP-Z		60±20	3.35 ^{+0.2} / _{-0.15}	0.65	0.1	3.60±0.15	0.12	20